
 Kilgore, TX	TYPE: Software Upgrade Procedure	NO: FCT-1367-03	REV: D
	TITLE: R8000 Upgrade 1.1.2.0 to 1.1.3.0	PAGE: 1 OF 4	

Purpose


The purpose of this procedure is to upgrade the system software on the R8000 from version 1.1.2.0 to version 1.1.3.0. Refer to the diagram below for an overview of the upgrade process. A USB thumb drive (of at least 128MB in size) is required for this procedure.

Upgrade Flow Chart

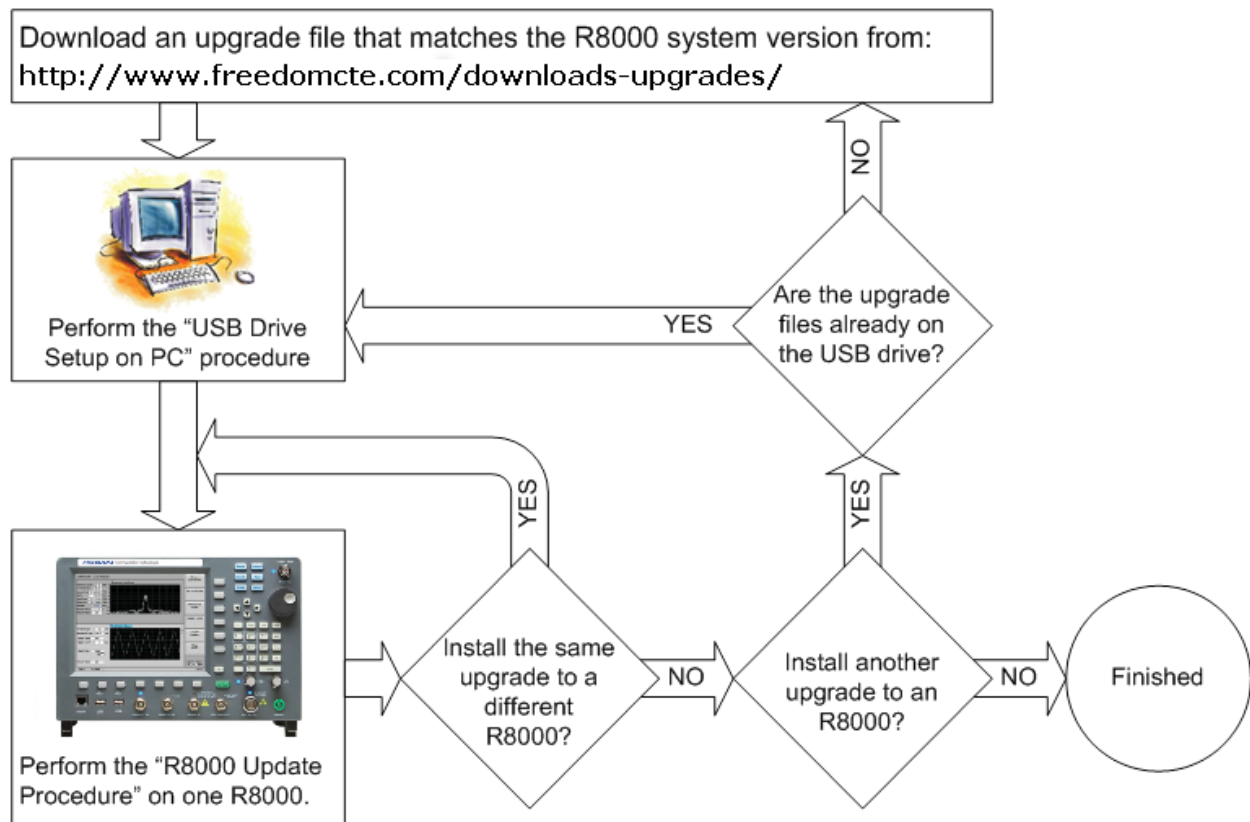

Conventions Used

Soft Key – The vertical and horizontal buttons along the edge of the R8000 LCD screen.

 Kilgore, TX	TYPE: Software Upgrade Procedure	NO: FCT-1367-03	REV: D
	TITLE: R8000 Upgrade 1.1.2.0 to 1.1.3.0	PAGE: 2 OF 4	

WARNING

PERFORM THESE STEPS WITH THE R8000 POWERED BY AN UNINTERRUPTABLE POWER SUPPLY (UPS). FAILURE TO DO SO COULD RESULT IN REQUIRING THE R8000 TO BE SENT BACK TO THE FACTORY FOR A FACTORY UPGRADE IN THE EVENT OF A POWER FAILURE OCCURRING DURING THE UPDATE PROCESS.

WARNING

THIS PROCEDURE REQUIRES A USB THUMB DRIVE WITH ANY SECURITY FEATURES (SUCH AS PASSWORD PROTECTION) DISABLED, AS THE R8000 WILL NOT BE ABLE TO ACCESS THE DRIVE OTHERWISE.

NOTE


THESE INSTRUCTIONS ARE FOR EXTRACTING THE UPDATE FILES USING WINDOWS XP BUILT IN ZIP FILE EXTRACTION. USING OTHER SOFTWARE WILL CHANGE THESE INSTRUCTIONS SLIGHTLY

NOTE

IT IS SAFE TO HAVE MORE THAN ONE SET OF ZIP UPDATE FILES ON THE SAME USB DRIVE. HOWEVER, IT IS VERY IMPORTANT TO DO BOTH SECTIONS BELOW BEFORE PROCEEDING TO THE NEXT UPGRADE, AS THE DIAGRAM ABOVE (UPGRADE FLOW CHART) ILLUSTRATES.

USB Drive Setup on PC

1. Extracting the USB Files
 - a. Move the "R8000A_Update_01010200_to_01010300.zip" zip file to the top level directory of the USB drive (the root of the drive).
 - b. Double click on the "R8000A_Update_01010200_to_01010300.zip".
 - c. Under "Folder Tasks" in the explorer window, click on the "Extract all files" option.
 - d. The Compressed Folders Extraction Wizard is shown.
 - e. Select "Next"

 Kilgore, TX	TYPE: Software Upgrade Procedure	NO: FCT-1367-03	REV: D
	TITLE: R8000 Upgrade 1.1.2.0 to 1.1.3.0	PAGE: 3 OF 4	

- f. In the window called "Extraction Wizard", click on the "Browse" button and select the USB drive as the destination. Please note that in the popup window called "Select a destination", it may be necessary to click the "+" beside "My Computer" to see the USB drive.
 - g. Press the "OK" button.
 - h. Press "Next" (to extract the files to the USB drive).
 - i. Ensure that the "Show extracted files" checkbox is checked.
 - j. Press the "Finish" button.
2. A "GDSATCOM" folder is present, and a file named "R8000A_Update_01010200_to_01010300.cmd".
 3. Double click on the "R8000A_Update_01010200_to_01010300.cmd" file. A window pops up and goes away quickly as the updates are activated on the USB drive.
 4. Use the "Safely Remove Hardware" icon in the system tray area (bottom right corner of your screen on most Windows installations) of the task bar. This ensures the update is completely transferred to your USB drive.

WARNING – Ignoring this step could cause the R8000 to become inoperable, and may result in the R8000 having to be returned to the factory for repair.



Windows XP

Windows Vista / 7

- a) Double click on the "Safely Remove Hardware" icon (shown above).
 - b) A window will appear. Select your USB device and click on the "Stop" button.
 - c) Another window will open up, possibly with a few options, but the default option is fine, simply click the "OK" button.
 - d) A "Safe to Remove Hardware" bubble appears alerting that the operation is complete.
 - e) This step ensures that the update is completely copied to the USB drive, before removing it from the PC.
5. Remove the USB drive from the PC.
 6. The process of extracting the R8000 updates to the USB drive is complete.

