



R8000 SERIES COMMUNICATIONS SYSTEM ANALYZER

AUTOTUNE USER GUIDE

BK Radio KNG-Pxxx Series Portable

Astronics Test Systems
12700 Ingenuity Dr. Orlando, FL 32826

Copyright © 2017 Astronics Test Systems
All Rights Reserved
Printed in U.S.A.

FCT-1002A

AUTOTUNE™ SOFTWARE LICENSE AGREEMENT

The software license agreement governing use of the R8000 Series Communications System Analyzer AutoTune™ software is located in FCT-1365 R8000 Series Communications System Analyzer Operator's Manual.

CREDITS

The Astronics Test System logo is a registered ® trademark of Astronics.

BK Relm is a registered trademark of BK Relm Corporation.

OpenG License

Copyright (c) 2002, Cal-Bay Systems, Inc. <info@calbay.com>
Copyright (c) 2002, Jean-Pierre Drolet <drolet_jp@hotmail.com>
Copyright (c) 2002-2007, Jim Kring <jim@jimkring.com>
Copyright (c) 2002-2005, Rolf Kalbermatter <rolf.kalbermatter@citeng.com>
Copyright (c) 2003-2004, Paul F. Sullivan <Paul@SULLutions.com> Copyright
(c) 2004, Enrique Vargas <vargas@visecurity.com>
Copyright (c) 2004, Heiko Fettig <heiko.fettig@gmx.net>
Copyright (c) 2004, Michael C. Ashe <michael.ashe@imaginatics.com>
Copyright (c) 2005-2006, MKS Instruments, Inc., author: Doug Femec
<doug_femec@mkinst.com>, IM dafemec
Copyright (c) 2006, JKI <info@jameskring.com>
Copyright (c) 2006, JKI <info@jameskring.com>; Authors: Jim Kring
<jim@jimkring.com>, Philippe Guerit <pjm_labview@yahoo.com>
Copyright (c) 2007, JKI <info@jameskring.com> (Author: Jim Kring
<jim.kring@jameskring.com>)
Copyright (c) 2008, Ton Plomp <t.c.plomp@gmail.com>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the SciWare, James Kring, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

MGI License

Copyright (c) 2010-2013, Moore Good Ideas, inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of Moore Good Ideas, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

TABLE OF CONTENTS

1. Introduction.....	1
2. Scope	1
3. Conventions.....	1
3.1. PPM.....	1
4. Important Notes	1
4.1. Required firmware.....	1
4.2. Supported models.....	1
5. BK Radio KNG-Pxxx Radio Test Setup	2
5.1. KNG-Pxxx Test Setup.....	2
6. BK Radio KNG-Pxxx Alignment and Test Descriptions	3
6.1. VCO RX Coarse Tune	4
6.2. VCO TX Coarse Tune.....	5
6.3. Ref Osc Crystal Frequency.....	6
6.4. Transmit Power Curve	7
6.5. Transmit Power Adjustment.....	8
6.6. Basic Troubleshooting	9
7. Support Information	10
7.1. Technical Support.....	10
7.2. Sales.....	10
APPENDIX A. Test Limits	A-1
APPENDIX B. Sample Test Result Report.....	B-1
APPENDIX C. Revision History.....	C-1

LIST OF FIGURES

Figure 5-1. KNG-Pxxx Test Setup Diagram2

Figure B-1. Sample Test Result Report B-1

LIST OF TABLES

Table 6-1. VCO RX Coarse Tune Alignment Results.....4

Table 6-2. VCO TX Coarse Tune Alignment Results.....5

Table 6-3. Analyzer Configuration for Reference Frequency6

Table 6-4. Reference Frequency Alignment Results.....6

Table 6-5. Reference Frequency Test Results.....6

Table 6-6. Analyzer Configuration for Transmit Power Curve Alignment7

Table 6-7. Transmit Power Curve Alignment Results7

Table 6-8. Transmit Power Curve Test Results7

Table 6-9. Analyzer Configuration for Transmit Power Alignment.....8

Table 6-10. Transmit Power Adjustment Alignment8

Table 6-11. BK Radio KNG Series Troubleshooting Chart9

Table A-1. Default BK Radio KNG-Pxxx Test Limits A-3

1. Introduction

The Astronics Test Systems R8000 Series Communications System Analyzer AutoTune™ (hereafter “AutoTune”) provides an automated test and alignment solution for supported two-way radios.

2. Scope

This document includes information regarding the tests and alignments performed for supported radios by AutoTune. This document is restricted to radio-specific information for BK Radio KNG-Pxxx series radios.

Please refer to the R8000 Series Communications System Analyzer Owner’s Manual (FCT-1365) for an overview and basic operating instructions for AutoTune itself.

3. Conventions

3.1. PPM

“ppm” is “parts per million”. This specification is generally limited to frequency-related measurements. If the frequency units are in MHz, then the ppm specification is in Hz. For example, a 169.075 MHz frequency with a ± 1.5 ppm specification is allowed to vary by $1.5 * 169.075$ MHz, or about ± 254 Hz.

4. Important Notes

4.1. Required firmware

All BK Radio KNG series radios must be running **v5.3.0 or later** firmware for AutoTune to successfully service them. Older firmware is not currently supported. BK Technologies firmware updates are currently available here:
<http://www.relmservice.com/Products/>.

4.2. Supported models

The following BK Radio KNG series models are supported by AutoTune:

- P150
- P400
- P500
- P800

5. BK Radio KNG-Pxxx Radio Test Setup

In order to perform the test and alignment procedures, the KNG-Pxxx radio must be connected to the R8000 Communications System Analyzer as shown in the figure below.



Make certain that the radio under test is configured as described in the corresponding diagram **before** attempting to perform an alignment or test. Failure to do so may result in poor radio performance and/or damage to the analyzer or radio equipment under test.

5.1. KNG-Pxxx Test Setup

Refer to the diagram below for the proper test setup.

Note: Parts numbers shown in the diagram are available from Astronics Test Systems.

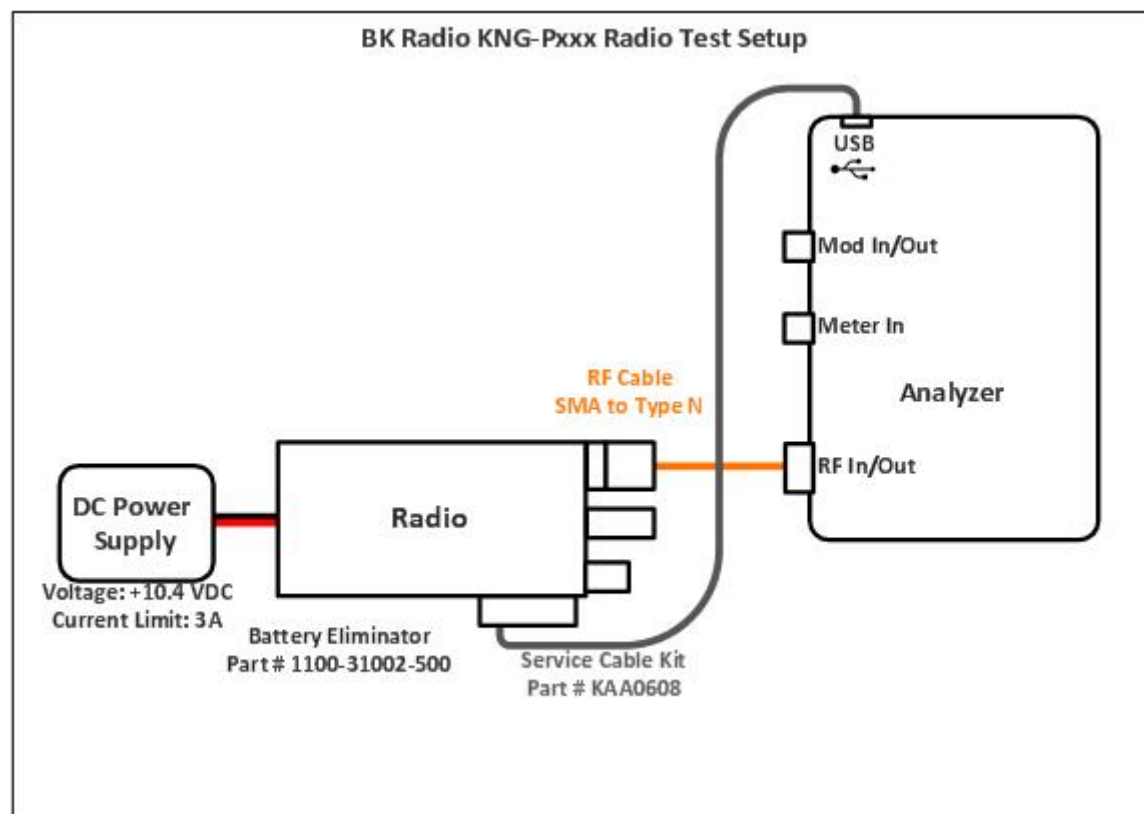


Figure 5-1. KNG-Pxxx Test Setup Diagram

6. BK Radio KNG-Pxxx Alignment and Test Descriptions

Note: Throughout this section are references to Test Frequency. Test Frequencies are band- and mode -specific. A table of the frequencies used by each band may be found in the respective BK Radio KNG-Pxxx radio service manual.

Note: All analyzer Mode settings are Standard unless otherwise indicated.

6.1. VCO RX Coarse Tune

6.1.1. Alignment

The radio is placed into Test Mode and the Analog Receive path is enabled for an array of receive frequencies. For each frequency, the “Synthesizer Coarse Tune” DAC is adjusted until an optimal ADC value is obtained. The final results are written to the log file.

Name	Description
Result	Pass or Fail.
Frequency	Test Frequency
New Softpot	Radio softpot after alignment.

Table 6-1. VCO RX Coarse Tune Alignment Results

6.2. VCO TX Coarse Tune

6.2.1. Alignment

The radio is placed into Test Mode and the radio is commanded to transmit an array of test frequencies. For each frequency, the “Synthesizer Coarse Tune” DAC is adjusted until an optimal ADC value is obtained. The final results are written to the log file.

Name	Description
Result	Pass or Fail.
Frequency	Test Frequency
New Softpot	Radio softpot after alignment.

Table 6-2. VCO TX Coarse Tune Alignment Results

6.3. Ref Osc Crystal Frequency

RF Control	Port	Frequency	Modulation	Attenuation
Monitor	RF IN/OUT	Test Frequency	FM	30 dB

Table 6-3. Analyzer Configuration for Reference Frequency

6.3.1. Alignment

The radio is placed into Test Mode at a Tx Test Frequency and commanded to transmit. Using a best linear fit algorithm, two frequency error measurements are taken at two different radio softpot values. These frequency error measurements are used to calculate the softpot value which minimizes frequency error. After programming this new softpot value into the radio, the radio softpot is fine tuned until minimum frequency error is detected. The frequency error is compared against test limits and the final results written to the log file.

Name	Description
Result	Pass or Fail. Frequency Error within Max Limit, Min Limit.
Frequency	Test Frequency
Freq Error	Measured frequency error
Min Limit	Minimum Limit (inclusive) for frequency error alignment
Max Limit	Maximum Limit (inclusive) for frequency error alignment
Old Softpot	Radio softpot before alignment
New Softpot	Radio softpot after alignment

Table 6-4. Reference Frequency Alignment Results

6.3.2. Test

The radio is placed into Test Mode at a Tx Test Frequency and commanded to transmit. The frequency error is measured by the analyzer and compared to test limits. The final results are written to the log file.

Name	Description
Result	Pass or Fail. Frequency Error within Max Limit, Min Limit.
Frequency	Test Frequency
Freq Error	Measured frequency error
Min Limit	Minimum Limit (inclusive) for frequency error
Max Limit	Maximum Limit (inclusive) for frequency error
Softpot	Radio softpot producing the Freq Error

Table 6-5. Reference Frequency Test Results

6.4. Transmit Power Curve

The Transmit Power Curve alignment aligns the “Transmit Power Set” DAC for each transmit test frequency to within the limits specified by BK Relm.

RF Control	Port	Frequency	Modulation	Attenuation
Monitor	RF IN/OUT	Test Frequency	FM	30 dB

Table 6-6. Analyzer Configuration for Transmit Power Curve Alignment

6.4.1. Transmit Power Curve Alignment

The radio is placed into Test Mode at high power at the first TX Test Frequency and commanded to transmit. For each frequency, the “Transmit Power Set” DAC is adjusted until the measured power is within the test limits. The test results for each Tx Test Frequency are written to the log file.

Name	Description
Result	Pass or Fail.
Frequency	Test Frequency
Power Out	Measured power level in watts
Min Limit	Minimum passable power level
Max Limit	Maximum passable power level
Old Softpot	Radio softpot before alignment
New Softpot	Radio softpot after alignment

Table 6-7. Transmit Power Curve Alignment Results

6.4.2. Transmit Power Curve Test

The radio is placed into Test Mode at high power at the first TX Test Frequency and commanded to transmit. For each frequency, the “Transmit Power Set” DAC is tested against the test limits. The test results for each Tx Test Frequency are written to the log file.

Name	Description
Result	Pass or Fail.
Frequency	Test Frequency
Power Out	Measured power level in watts
Min Limit	Minimum passable power level
Max Limit	Maximum passable power level
Softpot	Current radio softpot.

Table 6-8. Transmit Power Curve Test Results

6.5. Transmit Power Adjustment

The Transmit Power Adjustment determines the transmit power settings for High, Medium, and Low power levels.

RF Control	Port	Frequency	Modulation	Attenuation
Monitor	RF IN/OUT	Test Frequency	FM	30 dB

Table 6-9. Analyzer Configuration for Transmit Power Alignment

6.5.1. Transmit Power Adjustment Alignment

The radio is placed into Test Mode. At each power level and test frequency, an alignment is performed to align the TX Power Parameter within the limits provided by BK Relm. The test results for each Tx Test Frequency are written to the log file.

Name	Description
Result	Pass or Fail.
Frequency	Test Frequency
Power Out	Measured deviation level
Min Limit	Minimum passable power level
Max Limit	Maximum passable power level
Old Softpot	Radio softpot before alignment
New Softpot	Radio softpot after alignment

Table 6-10. Transmit Power Adjustment Alignment

6.6. Basic Troubleshooting

Symptom	Possible Cause	Possible Solution
Analyzer consistently fails to communicate with radio	Radio not running 5.3.0 firmware	AutoTune only supports test and alignment on KNG series radios running 5.3.0 firmware. Older firmware is not supported.
Analyzer occasionally fails to communicate with radio	USB hub in use	USB hubs are known to occasionally prevent or drop radio communication. Connect the radio programming cable directly to an analyzer USB port.
Tx Power aligns power output levels lower than expected.	Cable Sweep not enabled	Enable Settings > System Settings... > Cable Sweep > Cable Sweep. Change cable attenuation values to correspond with the RF cable in use. For example, if 0.5 dB of loss expected at 100 MHz and 1.5 dB of loss is expected at 1 GHz, enter “-0.5 dB” as the 100 MHz loss value and “-1.5 dB” as the 1 GHz loss value. Cable losses are entered as negative values.

Table 6-11. BK Radio KNG Series Troubleshooting Chart

7. Support Information

7.1. Technical Support

Telephone/Fax: 844.903.7333

Email: ATS.LMR-Customer.Support@astronics.com

Web: <http://freedomcte.com/support/>

7.2. Sales

Telephone/Fax: 844.903.7333

Email: LMRSales@astronics.com

Web: <http://freedomcte.com/sales/>

APPENDIX A. Test Limits

The factory limits contain the default limits as defined by the radio manufacturer and generally should not be modified. However, if extenuating circumstances cause a need to modify the limits this is accommodated by AutoTune. Refer to the R8000 Series Communications System Analyzer Owner's Manual (FCT-1365) for modification instructions.

The following tables list the default test limits for each BK Radio KNG-Pxxx radio model supported by AutoTune.

Section	Test Name	Limit	Default Value
6.3	Ref Osc Crystal Frequency	Ref Osc Crystal Frequency Align	Min= -0.15 ppm Max= 0.15 ppm
		Ref Osc Crystal Frequency Test	Min= -1.5 ppm Max= 1.5 ppm
6.4	Transmit Power Curve	Tx Power Curve Align VHF High	Min = 6.1 W Max = 6.3 W
		Tx Power Curve Test VHF High	Min = 6.0 W Max = 6.7 W
		Tx Power Curve Align UHF High	Min = 5.2 W Max = 5.4 W
		Tx Power Curve Test UHF High	Min = 5.0 W Max = 5.7 W
		Tx Power Curve Align 700/800MHz Band 1 High	Min = 2.4 W Max = 2.6 W
		Tx Power Curve Align 700/800MHz Band 2 High	Min = 2.9 W Max = 3.1 W
		Tx Power Curve Test 700/800MHz Band 1 High	Min= 2.25 W Max= 2.75 W
		Tx Power Curve Test 700/800MHz Band 2 High	Min=2.75 W Max=3.25 W
6.5	Transmit Power Adjustment	TX Power Adjustment Align VHF Low	Min= 0.95 W Max= 1.05 W
		TX Power Adjustment Align VHF Mid	Min= 5.15 W Max= 5.25 W
		TX Power Adjustment Align VHF High	Min= 6.15 W Max= 6.25 W
		TX Power Adjustment Test VHF Low	Min= 0.8 W Max= 1.3 W
		TX Power Adjustment Test VHF Mid	Min= 5.0 W Max= 6.0 W
		TX Power Adjustment Test VHF High	Min= 6.0 W Max= 6.7 W
		TX Power Adjustment Align UHF Low	Min= .95 W Max= 1.05 W
		TX Power Adjustment Align UHF Mid	Min= 4.25 W Max= 4.35 W
		TX Power Adjustment Align UHF High	Min= 5.25 W Max= 5.35 W
		TX Power Adjustment Test UHF Low	Min= .8 W Max= 1.3 W
		TX Power Adjustment Test UHF Mid	Min= 4.0 W Max= 4.7 W
		TX Power Adjustment Test UHF High	Min= 5.0 W Max= 5.7 W
		TX Power Adjustment Align 700/800MHz Band 1 Low	Min= .95 W Max= 1.05 W
		TX Power Adjustment Align 700/800MHz Band 1 Mid	Min= 2.45 W Max= 2.55 W
		TX Power Adjustment Align 700/800MHz Band 1 High	Min= 2.45 W Max= 2.55 W
		TX Power Adjustment Align 700/800MHz Band 2 Low	Min= .95 W Max= 1.05 W
		TX Power Adjustment Align	Min= 2.95 W

BK Relm KNG Series AutoTune™ User Guide

		700/800MHz Band 2 Mid	Max= 3.05 W
		TX Power Adjustment Align	Min= 2.95 W
		700/800MHz Band 2 High	Max= 3.05 W
		TX Power Adjustment Test	Min= .75 W
		700/800MHz Band 1 Low	Max= 1.25 W
		TX Power Adjustment Test	Min= 2.25 W
		700/800MHz Band 1 Mid	Max= 2.75 W
		TX Power Adjustment Test	Min= 2.25 W
		700/800MHz Band 1 High	Max= 2.75 W
		TX Power Adjustment Test	Min= .75 W
		700/800MHz Band 2 Low	Max= 1.25 W
		TX Power Adjustment Test	Min= 2.75 W
		700/800MHz Band 2 Mid	Max= 3.25 W
		TX Power Adjustment Test	Min= 2.75 W
		700/800MHz Band 2 High	Max= 3.25 W

Table A-1. Default BK Radio KNG-Pxxx Test Limits

APPENDIX B. Sample Test Result Report

Note: Results shown below are representative of actual results. Actual results and report format may vary.

```

=====
                        Test Result Report
=====
Model #:   KNG-P800:Portable      Date/Time:   6/2/2017 3:23 PM
Serial #:  10 30 00 00 16 11 80 67  Operator ID:  MMULLINS

Info: FLASH Version: 5.5.0

VCO RX Coarse Tune Align
=====
Result  Frequency      New Softpot
-----
Pass    763.0000 MHz     112
Pass    767.6650 MHz     126
Pass    772.3350 MHz     141
Pass    777.0000 MHz     155
Pass    851.0000 MHz     90
Pass    857.3350 MHz     114
Pass    863.6650 MHz     138
Pass    870.0000 MHz     164

VCO TX Coarse Tune Align
=====
Result  Frequency      New Softpot
-----
Pass    763.0000 MHz     39
Pass    777.0000 MHz     87
Pass    793.0000 MHz    149
Pass    805.9950 MHz    206
Pass    806.0050 MHz     30
Pass    824.0000 MHz     76
Pass    851.0000 MHz    157
Pass    870.0000 MHz    228

Reference Oscillator Frequency Align
=====
Result  Frequency      Freq Error  Min Limit  Max Limit  Old Softpot  New Softpot
-----
Pass    869.9875 MHz    49 Hz       -130 Hz    130 Hz     2304         -28

TX Power Curve Align
=====
Result  Frequency      Power Out  Min Limit  Max Limit  Old Softpot  New Softpot
-----
Pass    763.0000 MHz    2.5 W      2.4 W      2.6 W      128          160
Pass    777.0000 MHz    2.6 W      2.4 W      2.6 W      130          169
Pass    793.0000 MHz    2.5 W      2.4 W      2.6 W      130          169
Pass    805.9950 MHz    2.5 W      2.4 W      2.6 W      134          171
Pass    806.0050 MHz    3.0 W      2.9 W      3.1 W      181          187
Pass    824.0000 MHz    3.0 W      2.9 W      3.1 W      181          195
Pass    851.0000 MHz    3.1 W      2.9 W      3.1 W      186          195
Pass    870.0000 MHz    3.0 W      2.9 W      3.1 W      191          191

Transmit Power Adjustment - High Power
=====
Result  Frequency      Power Out  Min Limit  Max Limit  Old Softpot  New Softpot
-----
Pass    763.0000 MHz    2.45 W     2.25 W     2.75 W     112          123
Pass    777.0000 MHz    2.60 W     2.25 W     2.75 W     112          123
Pass    793.0000 MHz    2.45 W     2.25 W     2.75 W     129          111
Pass    805.9950 MHz    2.51 W     2.25 W     2.75 W     129          111
Pass    806.0050 MHz    3.12 W     2.75 W     3.25 W     128          112
Pass    824.0000 MHz    2.90 W     2.75 W     3.25 W     128          112
Pass    851.0000 MHz    3.23 W     2.75 W     3.25 W     128          116
Pass    870.0000 MHz    2.85 W     2.75 W     3.25 W     128          116

Transmit Power Adjustment - Medium Power
=====
Result  Frequency      Power Out  Min Limit  Max Limit  Old Softpot  New Softpot
-----
Pass    763.0000 MHz    2.43 W     2.25 W     2.75 W     129          123
Pass    777.0000 MHz    2.58 W     2.25 W     2.75 W     129          123
Pass    793.0000 MHz    2.43 W     2.25 W     2.75 W     96           111
Pass    805.9950 MHz    2.51 W     2.25 W     2.75 W     96           111
Pass    806.0050 MHz    3.12 W     2.75 W     3.25 W     128          112
Pass    824.0000 MHz    2.90 W     2.75 W     3.25 W     128          112
Pass    851.0000 MHz    3.23 W     2.75 W     3.25 W     128          116
Pass    870.0000 MHz    2.83 W     2.75 W     3.25 W     128          116

Transmit Power Adjustment - Low Power
=====
Result  Frequency      Power Out  Min Limit  Max Limit  Old Softpot  New Softpot
-----
Pass    763.0000 MHz    1.00 W     0.75 W     1.25 W     88           86
Pass    777.0000 MHz    1.09 W     0.75 W     1.25 W     88           86
Pass    793.0000 MHz    0.96 W     0.75 W     1.25 W     87           76
Pass    805.9950 MHz    0.98 W     0.75 W     1.25 W     87           76
Pass    806.0050 MHz    1.10 W     0.75 W     1.25 W     48           72
Pass    824.0000 MHz    1.01 W     0.75 W     1.25 W     48           72
Pass    851.0000 MHz    1.10 W     0.75 W     1.25 W     80           73
Pass    870.0000 MHz    0.92 W     0.75 W     1.25 W     80           73

Tests performed by AutoTune © 2017 Astronics Test Systems. All Rights Reserved. APP Version 2.3.4

```

Figure B-1. Sample Test Result Report

APPENDIX C. Revision History

A – Original Release	M. Mullins	M. Humphries	7/24/17	0130
Revision – Change	Requested By	Approved By	Rel. Date	ECO#